



**YUYUE**

**10SQ045**

10.0 AMP SCHOTTKY BARRIER RECTIFIERS



## FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability

## MECHANICAL DATA


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 1.65 grams

**VOLTAGE RANGE**

45 Volts

**CURRENT**

10.0 Amperes

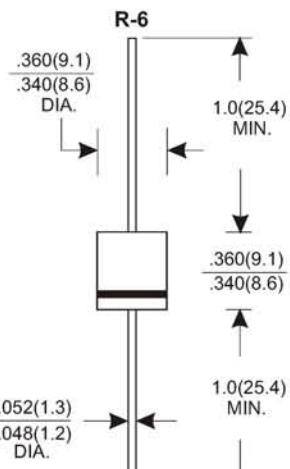

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.

Single phase half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	10SQ045	Units
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	45	Volts
Maximum RMS voltage	V <sub>RMS</sub>	32	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	45	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length(see fig.1)	I <sub>(AV)</sub>	10.0	Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated T <sub>J</sub> )	I <sub>FSM</sub>	150.0	Amps
Maximum instantaneous forward voltage at 10.0 A(Note 1)	V <sub>F</sub>	0.7	Volts
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	I <sub>R</sub>	0.2 50	mA
Typical junction capacitance(Note 3)	C <sub>J</sub>	400	pF
Typical thermal resistance (Note 2)	R <sub>θJC</sub>	2.5	°C/W
Operating junction temperature range at reduced reverse voltage V <sub>R</sub> <=80%V <sub>RRM</sub> V <sub>R</sub> <=50%V <sub>RRM</sub> in DC forward model	T <sub>J</sub>	-65 to +150 -65 to +175 -65 to +200	°C
Storage temperature range	T <sub>STG</sub>	-65 to +200	°C

Notes: 1.Pulse test: 300μs pulse width,1% duty cycle

2.Thermal resistance from junction to case

3.Measured at 1MHz and reverse voltage of 4.0 volts

## RATING AND CHARACTERISTIC CURVES (10SQ045)

FIG.1-FORWARD CURRENT DERATING CURVE

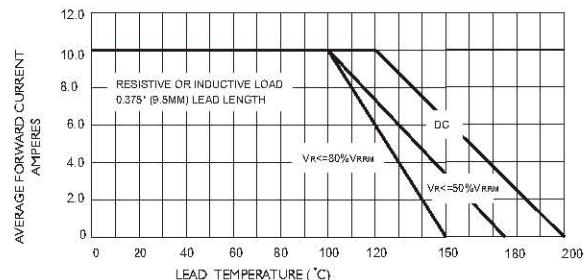


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


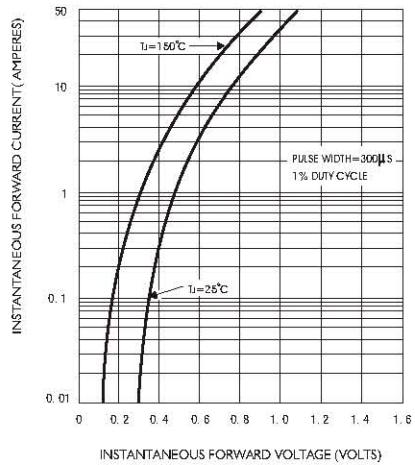


FIG.5-TYPICAL JUNCTION CAPACITANCE

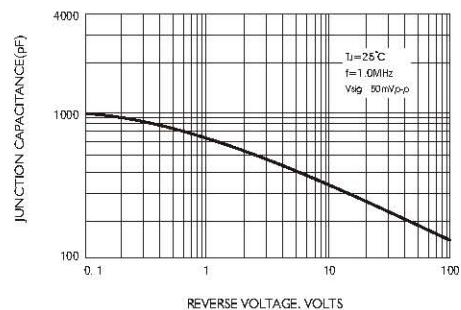

JINAN JINGHENG ELECTRONICS CO., LTD.

FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

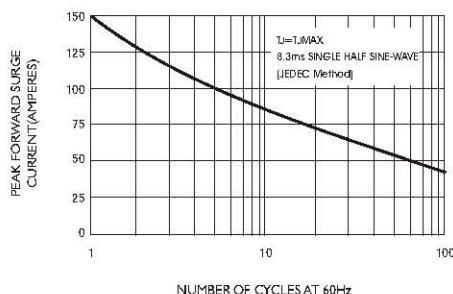


FIG.4-TYPICAL REVERSE CHARACTERISTICS


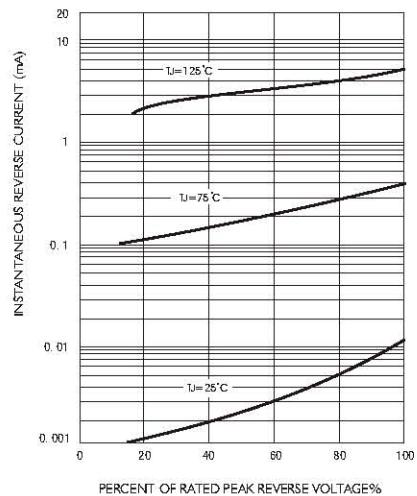


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

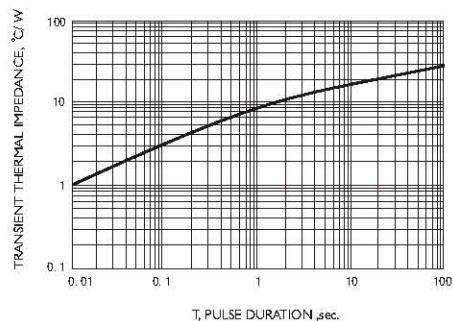

[HTTP://WWW.JINGHENGGROUP.COM](http://www.jinghenggroup.com)