



FEATURES

Small Package
Low Reverse Current
Fast Switching Speed
Surface Mount Package Ideally Suited for Automatic Insertion



SOD-523

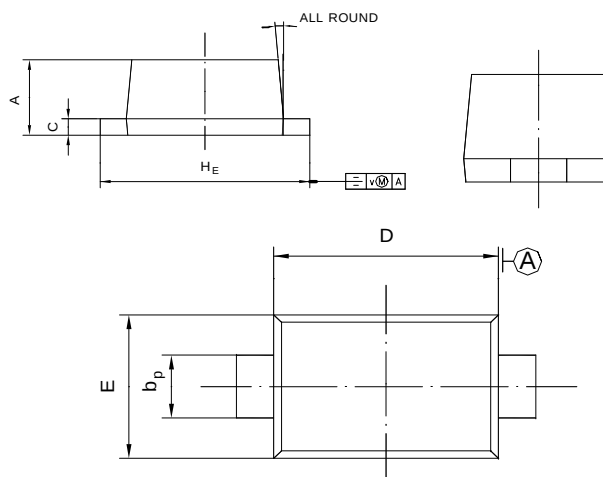

UNIT	A	b _p	C	D	E	H _E	V	
mm	0.70 0.60	0.4 0.3	0.135 0.100	1.25 1.15	0.85 0.75	1.7 1.5	0.1	5°

MAXIMUM RATINGS (T_a=25 unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{RM}	Non-Repetitive Peak Reverse Voltage	100	V
V _{R(RM)}	Peak Repetitive Reverse Voltage	75	V
V _{R(WM)}	Working Peak Reverse Voltage		
V _{R(RMS)}	RMS Reverse Voltage	53	V
I _O	Average Rectified Output Current	250	mA
I _{FSM}	Non-repetitive Peak Forward Surge Current @ t=8.3ms	2.0	A
P _D	Power Dissipation	150	mW
R _{ΘJA}	Thermal Resistance from Junction to Ambient	833	/W
T _J , T _{stg}	Operation Junction and Storage Temperature Range	-55~+150	

BAS516WT

ELECTRICAL CHARACTERISTICS($T_a=25$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse voltage	$V_{(BR)}$	$I_R=100\mu A$	75			V
Reverse current	I_R	$V_R=25V$			30	nA
		$V_R=75V$			1	μA
Forward voltage	V_F	$I_F=1mA$			0.715	V
		$I_F=10mA$			0.855	V
		$I_F=50mA$			1	V
		$I_F=150mA$			1.25	V
Total capacitance	C_{tot}	$V_R=0V, f=1MHz$			1	pF
Reverse recovery time	t_{rr}	$I_F=I_R=10mA, I_{rr}=0.1*I_R, R_L=100\Omega$			4	ns

RATING AND CHARACTERISTIC CURVES (BAS516WT)

