



# F2A THRU F2M

## 2.0 AMP SURFACE MOUNT FAST RECOVERY RECTIFIERS

### FEATURES

- \* Ideal for surface mount applications
- \* Easy pick and place
- \* Built-in strain relief
- \* Fast switching speed

### MECHANICAL DATA


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Metallurgically bonded construction
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any

### VOLTAGE RANGE

50 to 1000 Volts

### CURRENT

2.0 Ampere

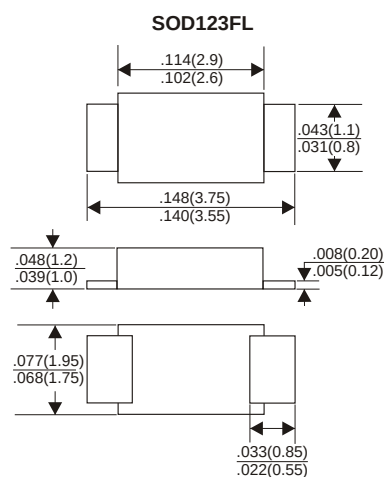

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

| TYPE NUMBER                                                                                           | F2A        | F2B | F2D | F2G | F2J | F2K | F2M  | UNITS |
|-------------------------------------------------------------------------------------------------------|------------|-----|-----|-----|-----|-----|------|-------|
| Maximum Recurrent Peak Reverse Voltage                                                                | 50         | 100 | 200 | 400 | 600 | 800 | 1000 | V     |
| Maximum RMS Voltage                                                                                   | 35         | 70  | 140 | 280 | 420 | 560 | 700  | V     |
| Maximum DC Blocking Voltage                                                                           | 50         | 100 | 200 | 400 | 600 | 800 | 1000 | V     |
| Maximum Average Forward Rectified Current<br>at Ta=90°C                                               | 2.0        |     |     |     |     |     |      | A     |
| Peak Forward Surge Current, 8.3 ms single half sine-wave<br>superimposed on rated load (JEDEC method) | 50         |     |     |     |     |     |      | A     |
| Maximum Instantaneous Forward Voltage at 2.0A                                                         | 1.3        |     |     |     |     |     |      | V     |
| Maximum DC Reverse Current<br>Ta=25°C                                                                 | 5.0        |     |     |     |     |     |      | μA    |
| at Rated DC Blocking Voltage<br>Ta=100°C                                                              | 150        |     |     |     |     |     |      | μA    |
| Maximum Reverse Recovery Time (Note 1)                                                                | 150        |     |     |     | 250 | 500 |      | nS    |
| Typical Junction Capacitance (Note 2)                                                                 | 35         |     |     |     |     |     |      | pF    |
| Operating and Storage Temperature Range Tj, Tstg                                                      | -65 — +150 |     |     |     |     |     |      | °C    |

#### NOTES:

1. Reverse Recovery Time test condition: IF=0.5A, IR=1.0A, IRR=0.25A
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

## RATING AND CHARACTERISTIC CURVES (F2A THRU F2M)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

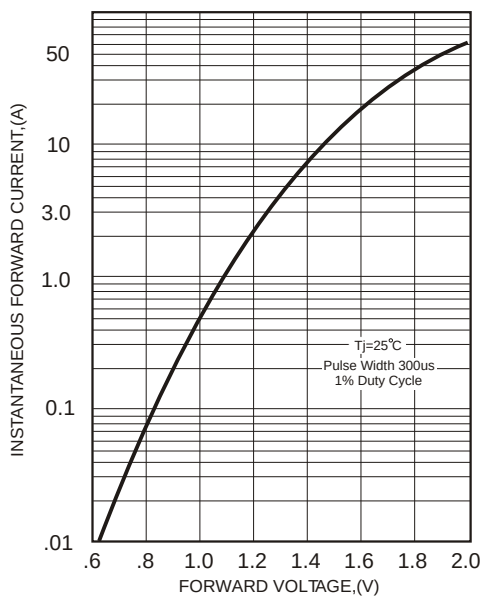


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE


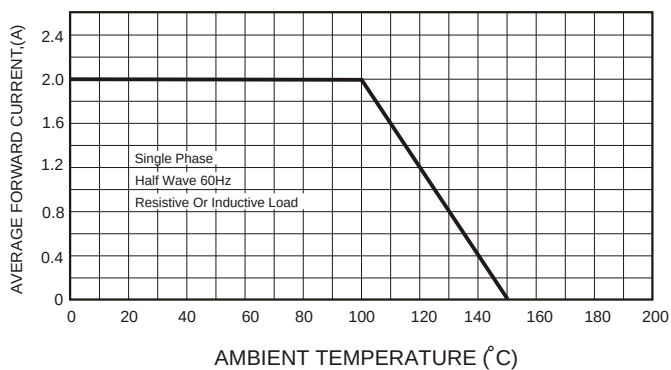


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

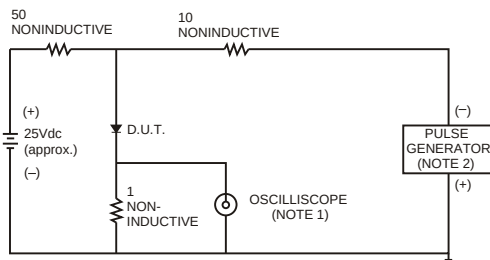

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm, 22pF.

2. Rise Time= 10ns max., Source Impedance= 50 ohms.

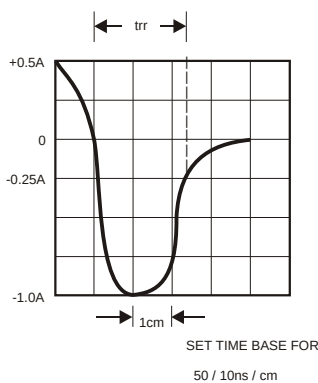


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

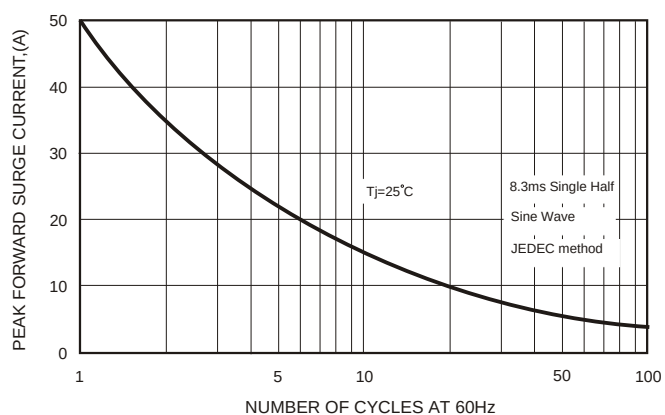


FIG.5-TYPICAL JUNCTION CAPACITANCE

