


FEATURE


- High voltage
- Large continuous collector current capability

MARKING: 1013



■ Simplified outline(SOT-89)

SOT-89 PACKAGE OUTLINE

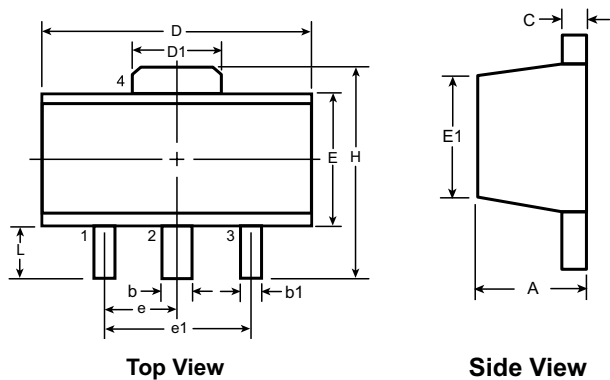

Symbol	A	b	b1	C	D	D1	E	E1	e	e1	H	L
Dimensions (mm)	MIN	1.40	0.44	0.36	0.3	4.40	1.50	2.29	2.00'	1.50 BSC	3.94	0.89
	NOM	-	-	-	-	-	-	-	-	3.00 BSC	-	-
	MAX	1.60	0.56	0.48	0.5	4.60	1.75	2.60	2.29	-	4.25	1.20

Dimensions in mm

MAXIMUM RATINGS (T_a=25 °C unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	-160	V
V _{CEO}	Collector-Emitter Voltage	-160	V
V _{EBO}	Emitter-Base Voltage	-6	V
I _c	Collector Current -Continuous	-1	A
P _C	Collector Power Dissipation	0.5	W
T _j	Junction Temperature	150	°C
T _{stg}	Storage Temperature	-55~+150	°C
R _{θJA}	Thermal Resistance from Junction to Ambient	250	°C/W

2SA1013

ELECTRICAL CHARACTERISTICS ($T_a=25$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=-100\mu A$, $I_E=0$	-160		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=-1mA$, $I_B=0$	-160		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=-10\mu A$, $I_C=0$	-6		V
Collector cut-off current	I_{CBO}	$V_{CB}=-150V$, $I_E=0$		-1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=-6V$, $I_C=0$		-1	μA
DC current gain	h_{FE}	$V_{CE}=-5V$, $I_C=-200mA$	60	320	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=-500mA$, $I_B=-50mA$		-1.5	V
Base-emitter voltage	V_{BE}	$I_C=-5mA$, $V_{CE}=-5V$		-0.75	V
Transition frequency	f_T	$V_{CE}=-5V$, $I_C=-200mA$	15		MHz

CLASSIFICATION OF h_{FE}

Rank	R	O	Y
Range	60-120	100-200	160-320

RATING AND CHARACTERISTIC CURVES (2SA1013)

