

2SC1623

NPN GENERAL PURPOSE SWITCHING TRANSISTOR

VOLTAGE 50Volts POWER 200mWatts


FEATURES

- NPN epitaxial silicon, planar design.
- Collector-emitter voltage $V_{CE}=50V$.
- Collector current $I_C=0.1A$.
- Transition frequency $f_T > 150MHz$ @ $I_C=10mA$, $V_{CE}=6V$, $f=30MHz$.
- In compliance with ER RoHS 2002/95/EC directives.



MECHANICAL DATA

Case: SOT-23, Plastic
Terminals: Solderable per MIL-STD-750, method 2026
Approx. Weight: 0.008gram

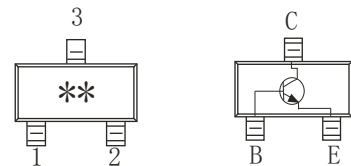

Range	90-180	135-270	200-400	300-600
Marking	L4	L5	L6	L7

MAXIMUM RATINGS ($T_a=25^{\circ}C$ unless otherwise noted)

Symbol	Parameter	Vaule	Unit
V_{CBO}	Collector-Base Voltage	60	V
V_{CEO}	Collector-Emitter Voltage	50	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current	0.1	A
P_C	Total Device Dissipation	0.25	W
$R_{\theta JA}$	Thermal Resistance Form Junction to Ambient	625	$^{\circ}C/W$
T_J	Junction Temperature	150	$^{\circ}C$
T_{STG}	Storage Temperature	-55~+150	$^{\circ}C$

2SC1623







ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
Collector-Base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu A, I_E=0$	60			V
Collector-Emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=0.1mA, I_B=0$	50			V
Emitter-Base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu A, I_C=0$	5			V
Collector cut-off current	I_{CBO}	$V_{CB}=60V, I_C=0$			0.1	μA
Collector cut-off current	I_{CEO}	$V_{CE}=40V, I_B=0$			0.1	μA
Base cut-off current	I_{BEX}				0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=3V, I_C=0$			0.1	μA
DC current gain*	H_{FE}	$I_C=0.1mA, V_{CE}=6.0V$	40			
	H_{FE}	$I_C=1mA, V_{CE}=6.0V$	90		600	
	H_{FE}	$I_C=50mA, V_{CE}=6.0V$	60			
	H_{FE}	$I_C=100mA, V_{CE}=6.0V$	30			
Collector-Emitter saturation voltage	$V_{CE(SAT)}$	$I_C=20mA, I_B=1.0mA$			0.2	V
		$I_C=100mA, I_B=5.0mA$			0.3	V
Base-Emitter Saturation voltage*	$V_{BE(SAT)}$	$I_C=20mA, I_B=1.0mA$			0.85	V
		$I_C=100mA, I_B=5.0mA$			0.95	V
Transition frequency	f_T	$I_C=10mA, V_{CE}=6V, f=30MHz$	150			MHz
Delay time	t_d	$V_{CC}=10V, V_{BE}=-0.5V,$ $I_C=10mA, I_B=1.0mA$			35	nS
Rise time	t_r				35	nS
Storage time	t_s	$V_{CC}=3V, V_{BE}=-0.5V,$ $I_{B1}=I_{B2}=1.0mA$			200	nS
Fall time	t_f				50	nS


*Pulse Test: Pulse Width<300uS, Duty Cycle<2.0%.

2SC1623


ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise specified)

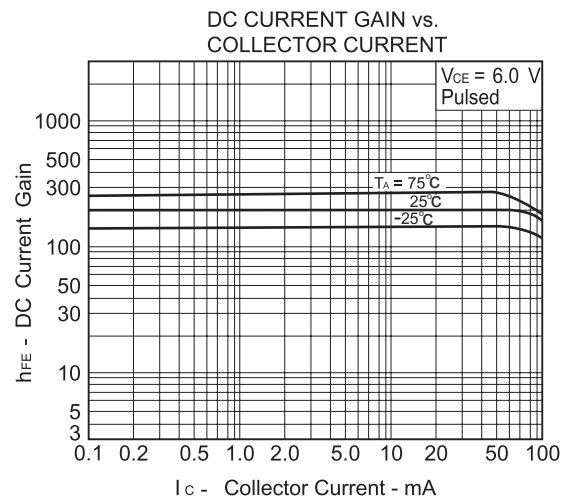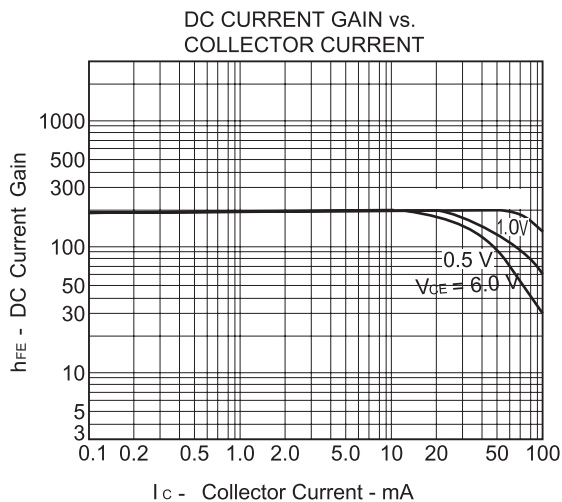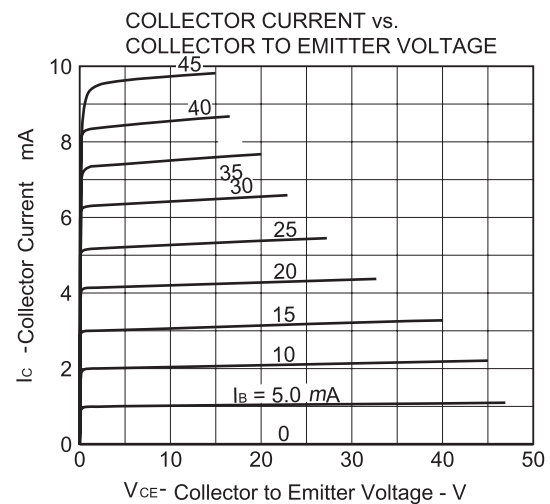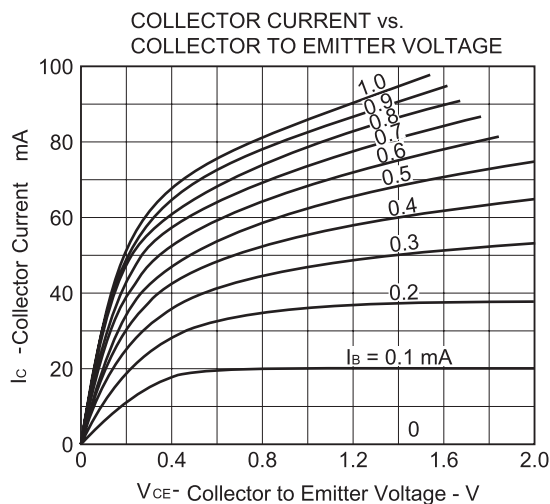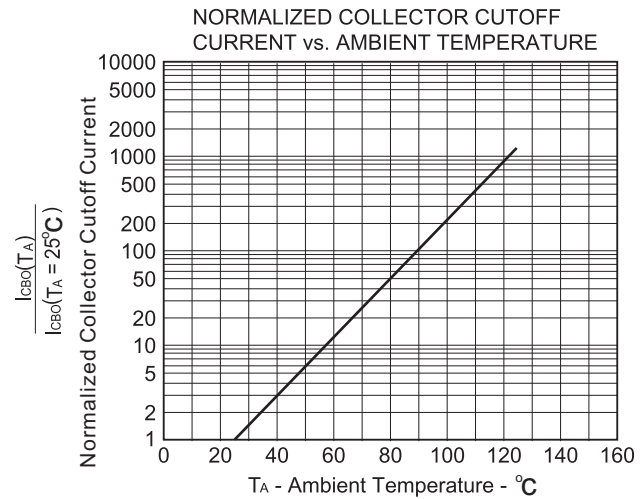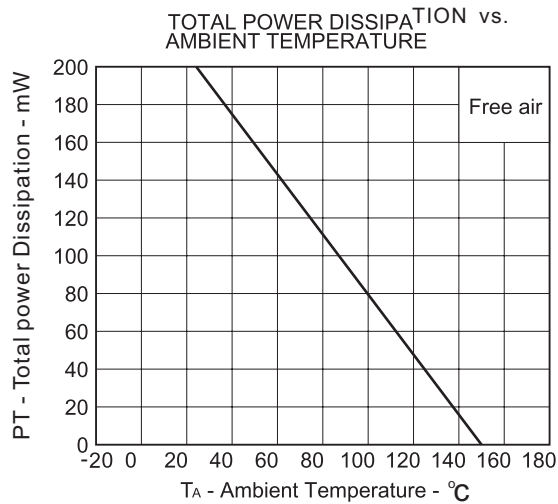


SMALL SIGNAL CURRENT GAIN vs.
DC CURRENT GAIN

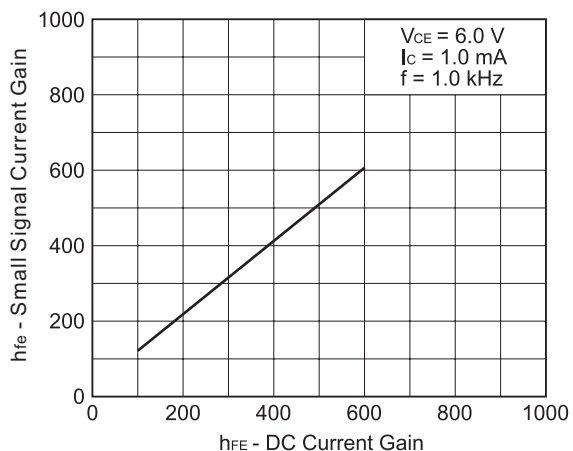


INPUT IMPEDANCE VOLTAGE FEEDBACK
RATIO AND OUTPUT ADMITTANCE vs.
SMALL SIGNAL CURRENT GAIN

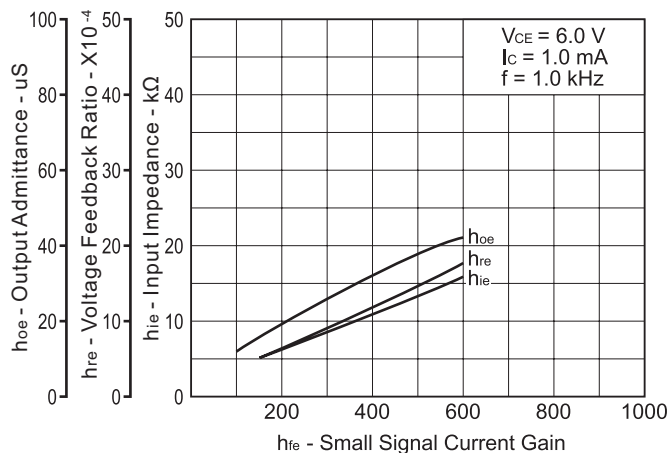

COLLECTOR CURRENT vs.
BASE TO EMITTER VOLTAGE

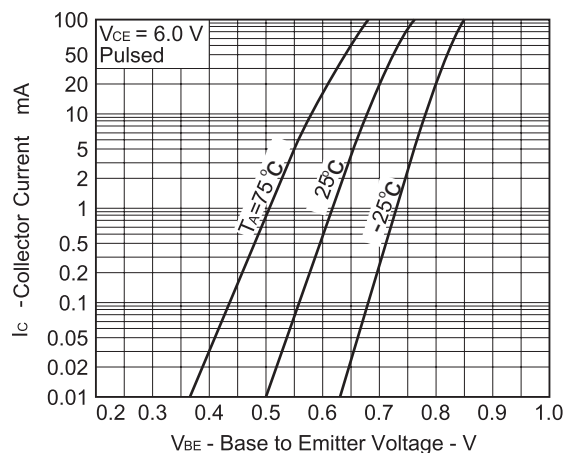


SOT-23 OUTLINE DIMENSIONS

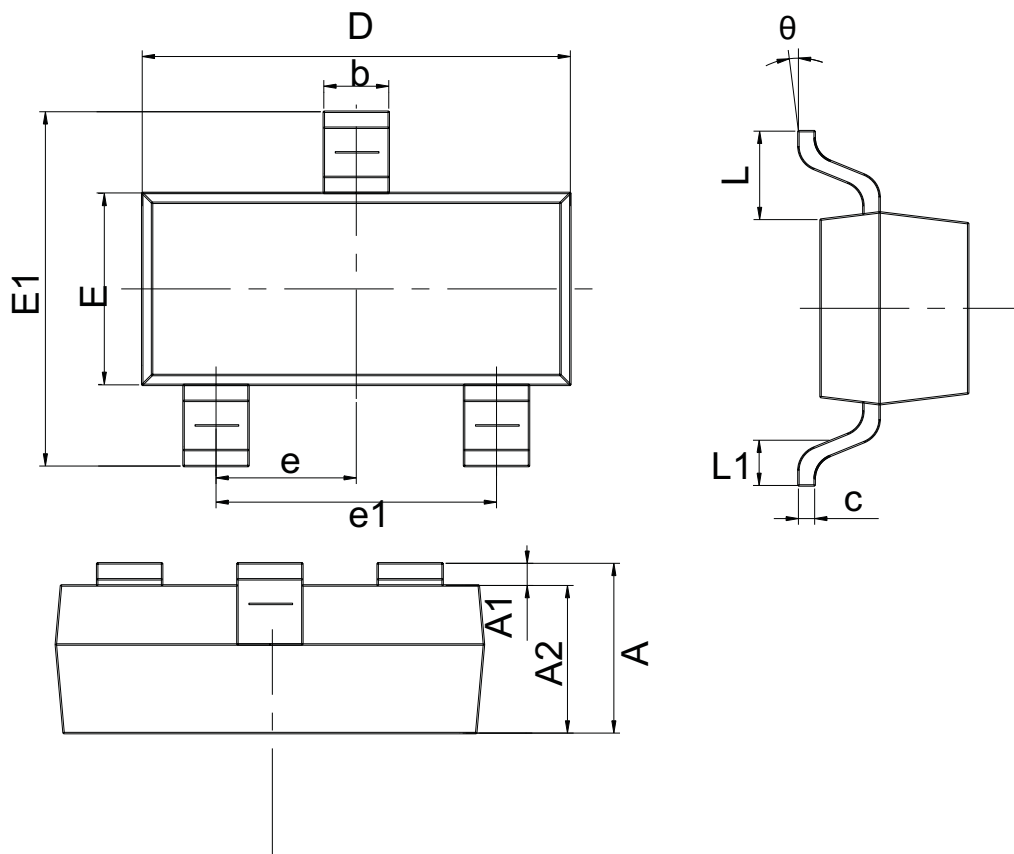

symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950REF.		0.037REF.	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Tape and reel

SOT-23 Embossed Carrier Tape

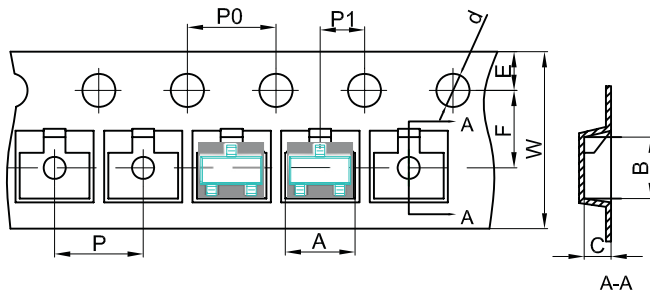


Packaging Description:


SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00
(Tolerance)	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+0.3/-0.1

SOT-23 Tape Leader and Trailer

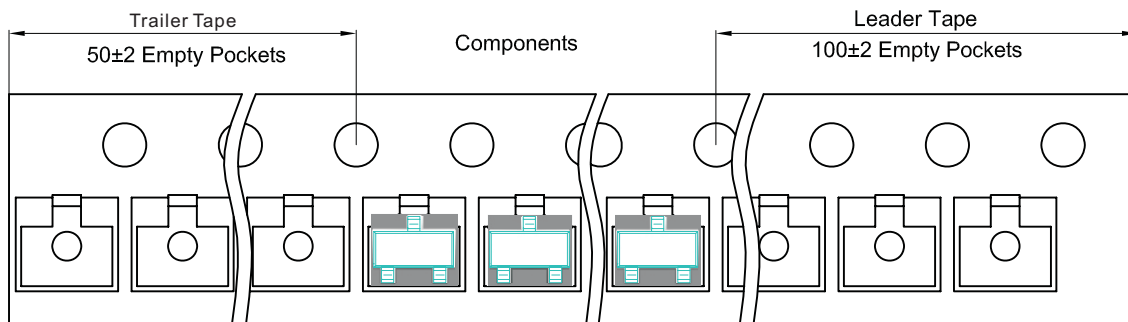


SOT-23 Reel

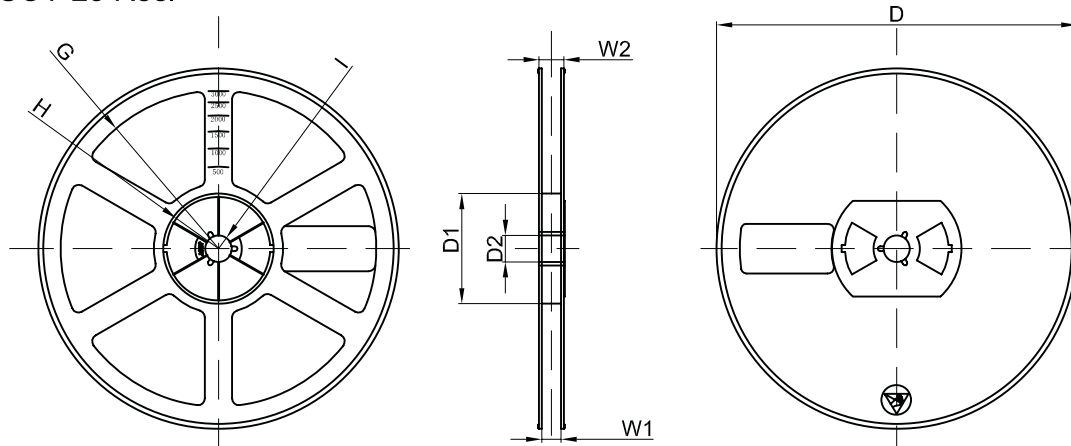

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30
Tolerance	+/-2	+/-1	+/-1	+/-1	+/-1	+/-1	+/-1	+/-1

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	210x208x203	180,000 pcs	440x440x230	8.45

SOT-23 Pad size

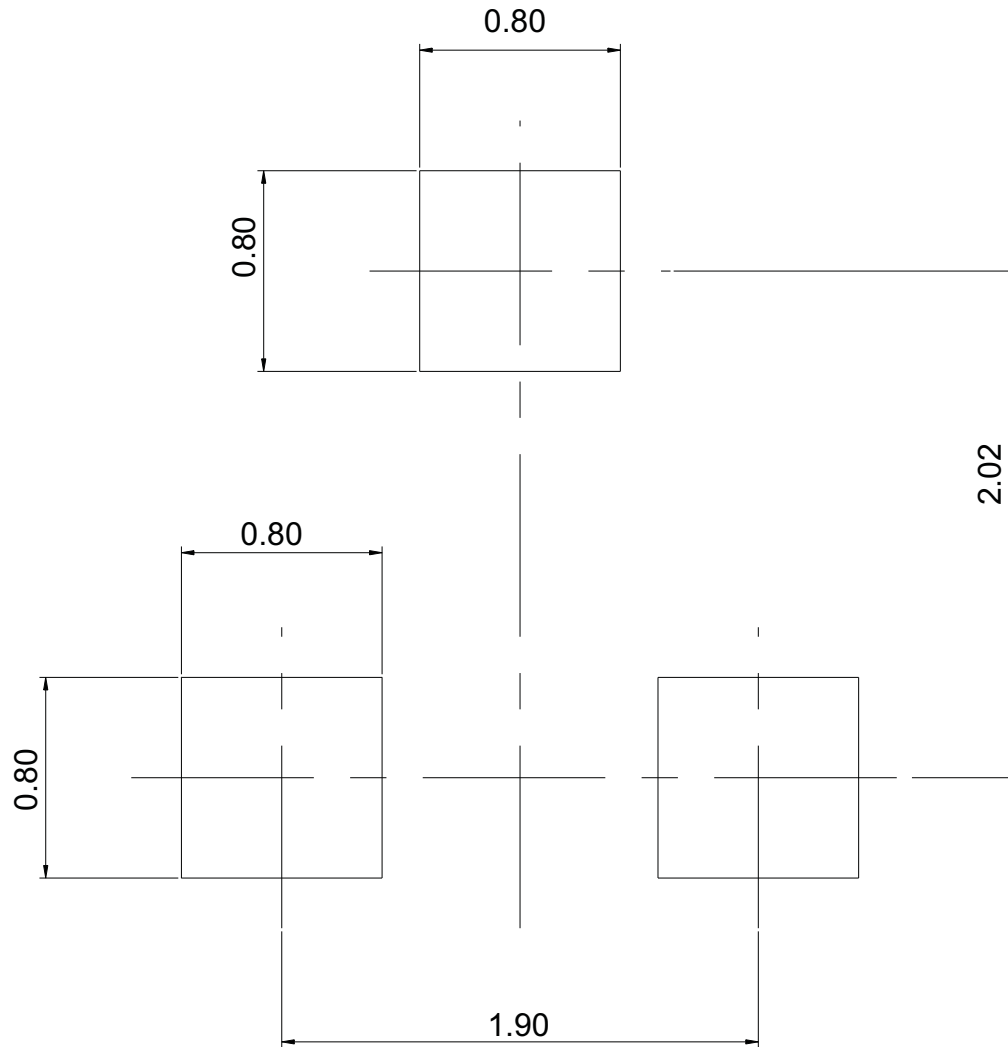

Center distance		1.90
Lead size	Lead width	0.40
	Lead length	0.55
Pad size	Pad width	0.80
	Pad length	0.80

Unit: mm