

# 产品承认书

## PRODUCT SPECIFICATION FOR APPROVAL

客户名称 CUSTOMER NAME	
客户料号 P/N OF CUSTOMER	
承认字号 APPROVAL NO.	
产品类别 PRODUCT CATEGORY	功率型负温度系数热敏电阻 POWER TYPE NTC THERMISTORS
产品名称 PRODUCT NAME	PN2R5D7
规格型号 TYPE SPECIFICATION	PN2R5D7F17SENM
承认书版本号 APPROVAL SHEET VERSION	1.0
产品环保符合 PRODUCT ENVIRONMENTAL COMPLIANCE	<input checked="" type="checkbox"/> RoHS 2.0 <input checked="" type="checkbox"/> HF <input checked="" type="checkbox"/> REACH
承认日期 DATE OF APPROVAL	

供 应 商 SUPPLIER		
制定 DESIGNED	审核 CHECKED	批准 APPROVED
供应商品管部印鉴 SUPPLIER QA SEAL		

客 户 CUSTOMER		
检验 INSPECTED	审核 CHECKED	批准 APPROVED
客户承认印鉴 CUSTOMER APPROVAL SEAL		



## 目录

### CONTENTS

1、规格型号 PART IDENTIFICATION .....	1
2、产品特性 PRODUCTION FEATURES .....	2
2.1 技术参数 TECHNICAL PARAMETER .....	2
2.2 外形尺寸、材质 PRODUCTION DIMENSION、MATERIAL .....	3
3、检验规则 INSPECTION REGULATIONS .....	4
3.1 出厂检验 DELIVERY INSPECTION .....	4
3.2 型式检验 PATTERN INSPECTION .....	5
4、包装、贮存 PACKAGE & STORAGE .....	6
4.1 包装 PACKAGE .....	6
4.2 贮存 STORAGE .....	7
5、电压 - 电流特性曲线 VOLTAGE - CURRENT CHARACTERISTIC CURVE .....	8
6、电阻 - 温度特性曲线 RESISTANCE-TEMPERATURE CHARACTERISTIC CURVE .....	9
7、硅树脂使用注意事项 PRECAUTIONS FOR USING SILICONE RESIN .....	10

1、规格型号 PART IDENTIFICATION

PN    2R5    D7    F    17    S    E    NM  
 ①    ②    ③    ④    ⑤    ⑥    ⑦    ⑧

<p>① 产品类别 PART NUMBER ENTIFICATION</p>	<p>PN 指功率型负温度系数热敏电阻; PN REFERS TO POWER TYPE NEGATIVE TEMPERATURE COEFFICIENT THERMISTOR</p>
<p>② 25°C零功率阻值 ZERO POWER RESISTANCE AT 25°C</p>	<p>2R5指2.5Ω; 2R5 REFERS TO 2.5Ω</p>
<p>③ 产品系列 PRODUCT SERIES</p>	<p>D7指D7系列; D7 REFERS TO THE D7 SERIES</p>
<p>④ 引脚形状 PIN SHAPE</p>	<p>F指前后弯; F FINGERS CURVED FORWARD AND BACKWARD</p>
<p>⑤ 编带高度 BRAID HEIGHT</p>	<p>17指产品编带高度H0=17mm; 17 REFERS TO THE PRODUCT BRAID HEIGHT H0=17MM</p>
<p>⑥ 封装材料 ENCAPSULATION MATERIAL</p>	<p>S 指头部封装料为硅树脂; S REFERS TO THE HEAD ENVELOPING MATERIAL IS SILICONE</p>
<p>⑦ 环保产品 ECO-FRIENDLY PRODUCTS</p>	<p>E 表示环保; E MEANS ENVIRONMENTAL PROTECTION</p>
<p>⑧ 特殊定义 SPECIAL DEFINITION</p>	<p>NM指产品导线直径为0.8mm，脚距5.0mm，产品精度±15%。 NM REFERS TO THE DIAMETER OF THE PRODUCT WIRE IS 0.8MM, THE FOOT DISTANCE IS 5.0MM, AND THE PRODUCT ACCURACY IS ±15%.</p>


## 2、产品特性 PRODUCTION FEATURES

## 2.1 技术参数 TECHNICAL PARAMETER

规格型号 SPECIFICATIONS AND MODELS	PN2R5D7F17SENM
额定零功率电阻值 $R_{25}(\Omega)$ RATED ZERO POWER RESISTANCE VALUE $R_{25}(\Omega)$	2.5
残余电阻( $\Omega$ ) RESIDUAL RESISTANCE( $\Omega$ )	0.205
最大稳态电流 (A) MAXIMUM STEADY-STATE CURRENT (A)	4
最大额定功率 (W) MAXIMUM POWER RATING (W)	3.3
耗散系数 (mw/°C) DISSIPATION FACTOR	15
热时间常数(S) THERMAL TIME CONSTANT (S)	17
工作温度范围 (°C) OPERATING TEMPERATURE RANGE (°C)	-40 ~ 170

2.2 外形尺寸、材质 PRODUCTION DIMENSION、MAATERIAL

(单位 UNIT: MM)

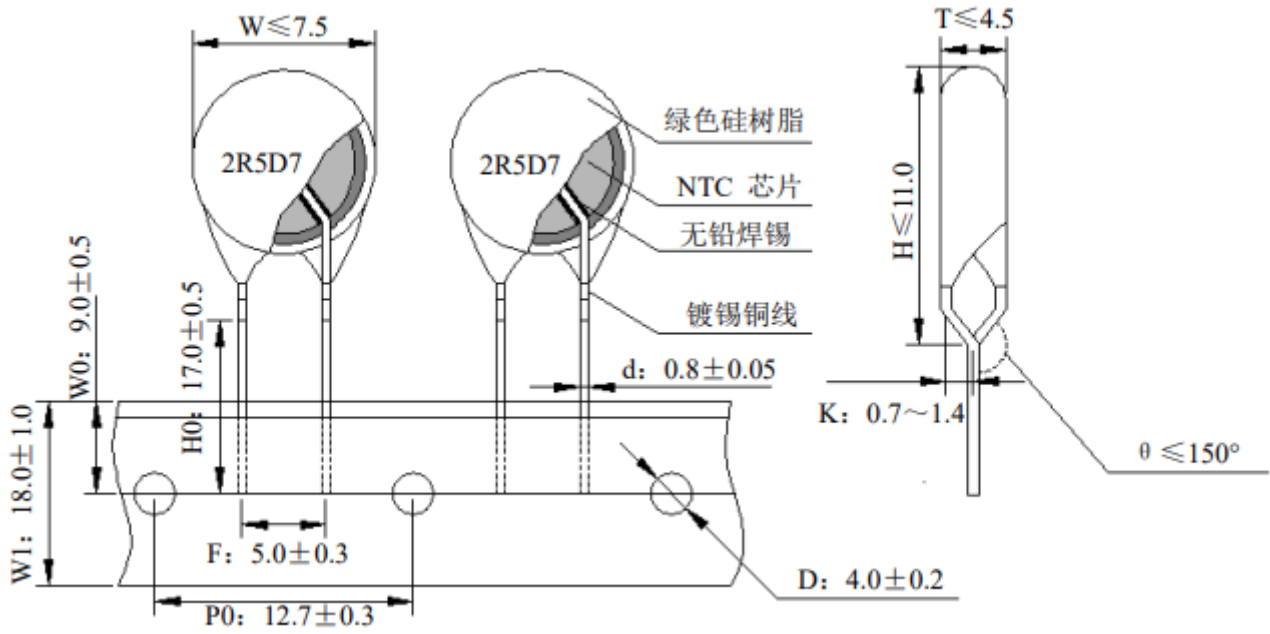

## 3、检验规则 INSPECTION REGULATIONS

## 3.1 出厂检验 DELIVERY INSPECTION

序号 SEQUENCE	检验项目 ITEMS	检验方法 METHOD	性能要求 PERFORMANCE REQUIREMENT
(1)	R <sub>25</sub>	将待测品置于25°C高精度油槽内稳定后 测量 THE PRODUCT TO BE MEASURED IS STABILIZED IN A 25°C HIGH-PRECISION OIL TANK	2.5Ω±15%
(2)	外观 APPEARANCE	目测检查 VISUAL INSPECTION	产品符合2.2的外形要求，标识清 晰，无破裂、针孔、严重变形、 污点等 THE PRODUCT MEETS THE APPEARANCE REQUIREMENTS OF 2.2, WITH CLEAR MARKS, NO CRACKS, PINHOLES, SERIOUS DEFORMATION, STAINS, ETC
(3)	尺寸 DIMENSION	用精度不小于0.01mm的游标卡尺测量 MEASURE WITH VERNIER CALIPER WITH ACCURACY NOT LESS THAN 0.01MM	符合2.2的外形尺寸 CONFORMS TO THE DIMENSIONS OF 2.2
(4)	可焊性 WELDABILITY	焊接温度 WELDING TEMPERATURE: 245 ±5°C; 浸入时间 IMMERSION TIME: 3±1s	着锡面积 TIN AREA ≥95%
(5)	耐焊性 WELDING RESISTANCE	焊接温度 WELDING TEMPERATUE: 260 ±10°C 浸入时间 IMMERSION TIME: 10±1s	无外观损伤 NO APPEARANCE DAMAGE   ΔR <sub>25</sub> /R <sub>25</sub>   ≤10%

## 3.2 型式检验 PATTERN INSPECTION

序号 SEQUENCE	检验项目 ITEMS	检验标准 STANDARD	检验方法 INSPECTION METHOD	性能要求 PERFORMANCE REQUIREMENT
(1)	高温存储 HIGH TEMPERATURE STORAGE	IEC68-2- 2/CNS5550	温度 TEMPERATURE: $170\pm 2^{\circ}\text{C}$ 时间 TIME: $1000\pm 24\text{h}$ ;	无外观损伤 NO APPEARANCE DAMAGE   $\Delta R_{25}/R_{25}$   $\leq 20\%$
(2)	冷热冲击 THERMAL SHOCK	IEC68-2-14	温度 TEMPERATURE: $-40^{\circ}\text{C}$ , $+150^{\circ}\text{C}$ 周期 CYCLE: 100,30min/cyc	无外观损伤 NO APPEARANCE DAMAGE   $\Delta R_{25}/R_{25}$   $\leq 20\%$
(3)	低温存储 LOW TEMPERATURE STORAGE	IEC68-2-1	温度 TEMPERATURE: $-40\pm 2^{\circ}\text{C}$ 时间 TIME: $1000\pm 24\text{h}$	无外观损伤 NO APPEARANCE DAMAGE   $\Delta R_{25}/R_{25}$   $\leq 20\%$
(4)	绝缘电阻测试 INSULATION RESISTANCE TEST	MIL-STD-202F- Method 302	绝缘电压 INSULATION VOLTAGE: $500\text{V}_{\text{DC}}$ 时间 TIME: 1min	无外观损伤 NO APPEARANCE DAMAGE 绝缘电阻 INSULATION RESISTANCE: $\geq 200$ $\text{M}\Omega$
(5)	耐久性 DURABILITY	UL1434	环境温度 AMBIENT TEMPERATURE: $25\pm 2^{\circ}\text{C}$ ; 额定电压, 额定电流 额定电容: 240VDC下的电容值 RATED VOLTAGE, RATED CURRENT, AND RATED CAPACITANCE: CAPACITANCE AT 240VDC 周期 PERIOD: 6000	无外观损伤 NO APPEARANCE DAMAGE   $\Delta R_{25}/R_{25}$   $\leq 20\%$




4、包装、贮存 PACKAGE & STORAGE

4.1 包装 PACKAGE

序号 SEQUENCE	包装方式 PACKAGING	包装材料、尺寸 PACKAGING MATERIAL & DIMENSION	产品数量 PART QUANTITY
(1)	包装盒 PACKING BOX	纸盒 PAPER BOX, L×W×H=330mm×280mm×43mm	1500PCS
(2)	外包装箱 OUTER PACKING BOX	纸箱 CARTON, L×W×H=583mm×350mm×250mm	

盒装包装盒尺寸 BOX PACKING BOX SIZE:

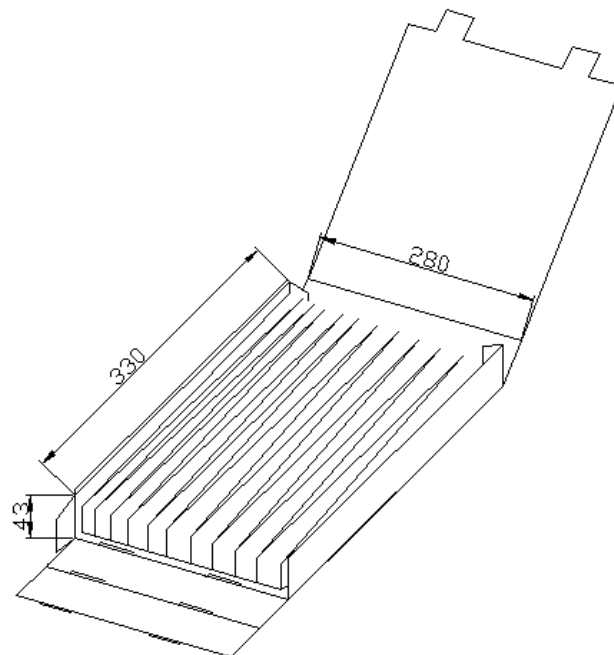


#### 4.2 贮存 STORAGE


产品密封保存，存放产品的仓库环境温度 -10℃ ~ +40℃、相对湿度不大于 70%，仓库内不允许有各种有害气体、易爆的产品及有腐蚀性的化学物品，并且无强烈的机械振动、冲击和强辐射的作用，包装箱应垫高地面至少 20cm，距离墙壁、热源、冷源、窗口或空气入口至少 50cm。

- ★ THIS PRODUCT MUST BE KEPT SEALED.
- ★ STORE IN AN ORDINARY ENVIRONMENT (NORMAL ROOM TEMPERATURE, HUMIDITY AND ATMOSPHERIC PRESSURE).
- ★ STORAGE TEMPERATURE: -10℃~+40℃
- ★ RELATIVE HUMIDITY: ≤70%RH
- ★ KEEP AWAY FROM CORROSIVE GASES, DEOXIDIZING GAS, FLAMMABLE GAS OR DIRECT SUNLIGHT.
- ★ AVOID STRONG MECHANICAL VIBRATION, SHOCK.
- ★ THE PACKING BOX SHOULD BE RAISED AT LEAST 20CM ABOVE THE GROUND AND AT LEAST 50CM AWAY FROM THE WALL, HEAT SOURCE, COLD SOURCE, WINDOWS OR AIR INLET.
- ★ ABNORMAL STORAGE AND OPERATING CONDITIONS MAY CAUSE MALFUNCTION FUNCTION OR FAILURE OF OUR PRODUCTS.

5、电压 - 电流特性曲线 VOLTAGE-CURRENT CHARACTERISTIC CURVE

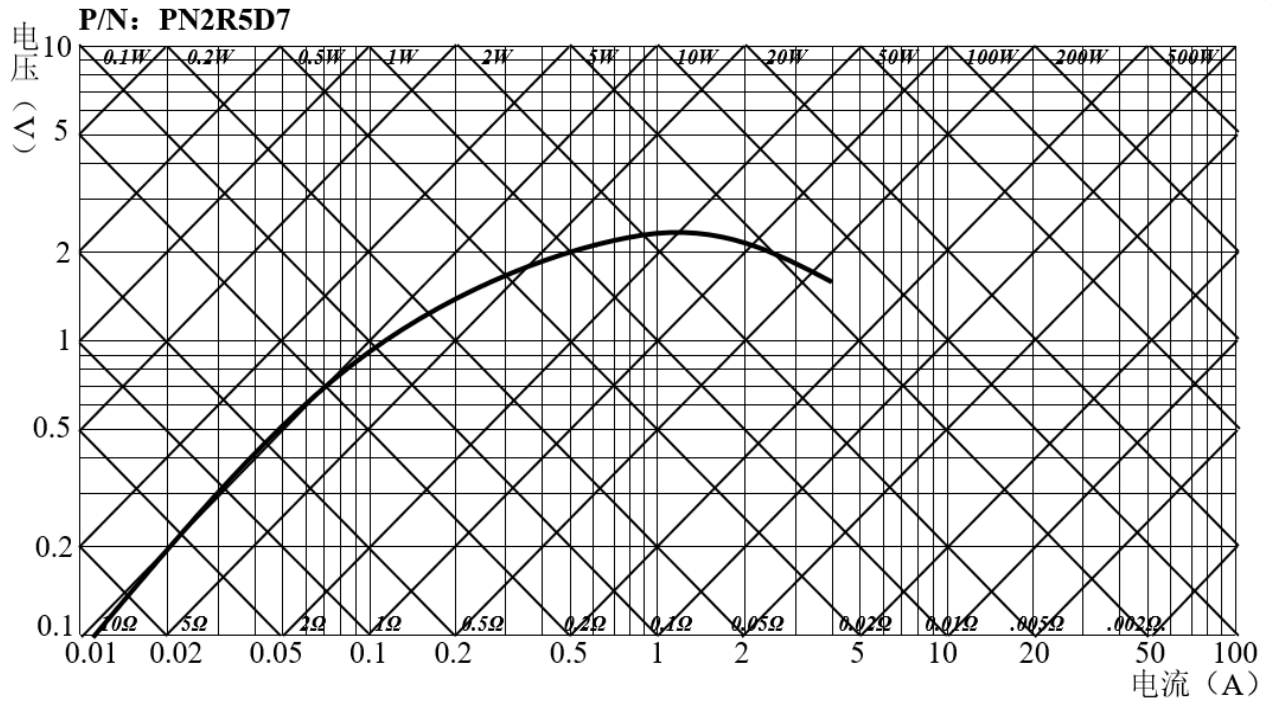

6、电压 - 电流特性曲线 RESISTANCE-TEMPERATURE CHARACTERISTIC CURVE

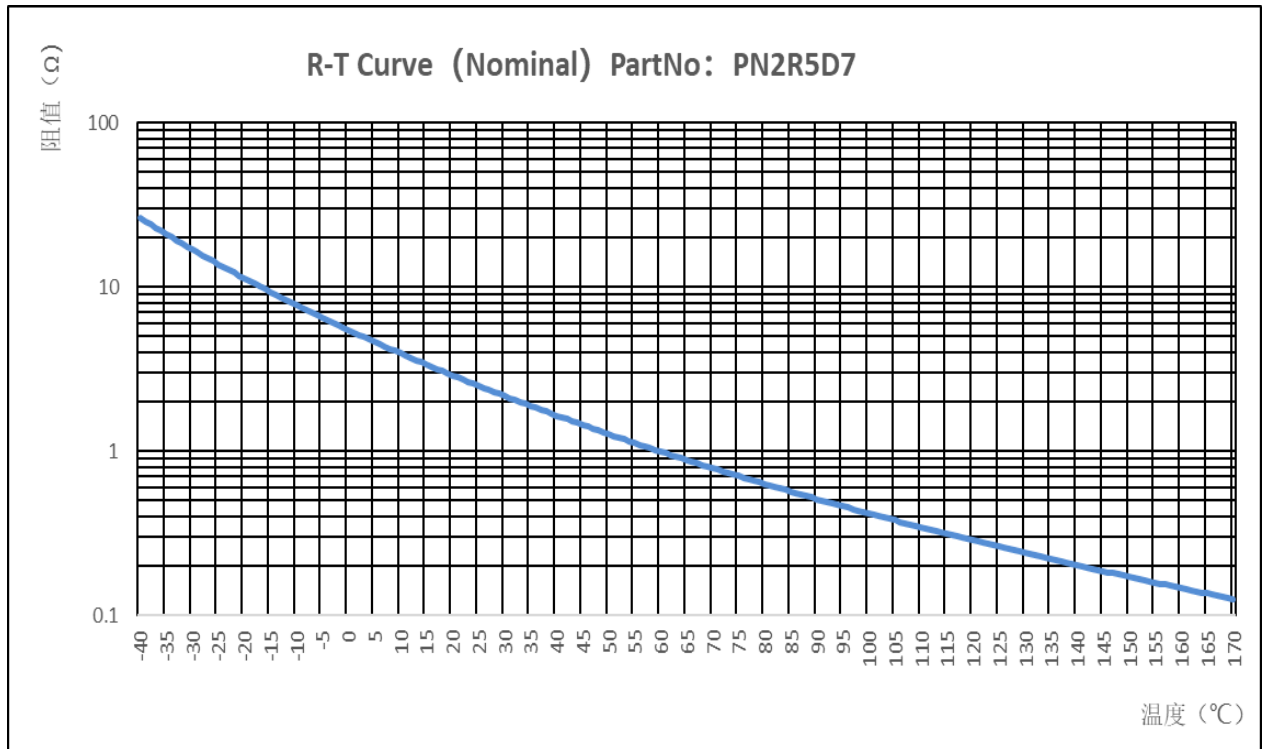

## 7、硅树脂使用注意事项PRECAUTIONS FOR USING SILICONE RESIN

7.1 此涂装材料为硅树脂，相当坚固，但韧性较差，如受不正当外力的情况下，（如搬运重摔、引脚向外掰、插PCB板孔径不对、作用力不当的掰引脚）可能会产生脚裂、本体破损的现象；

THIS COATING MATERIAL IS SILICONE RESIN, QUITE STRONG, BUT POOR TOUGHNESS, SUCH AS THE CASE OF IMPROPER EXTERNAL FORCE, (SUCH AS HANDLING HEAVY FALL, PIN OUT, PCB BOARD APERTURE IS NOT CORRECT, IMPROPER FORCE OF THE PIN) MAY PRODUCE FOOT CRACK, BODY DAMAGE PHENOMENON;

7.2 因硅树脂的材料特性，产品在运输过程中，因摩擦易出现摩擦痕迹现象，但易人工擦除，且此现象完全不会影响产品特性。

DUE TO THE MATERIAL CHARACTERISTICS OF SILICONE RESIN, THE PRODUCT IS PRONE TO FRICTION TRACES DURING TRANSPORTATION, BUT IT IS EASY TO MANUALLY ERASE, AND THIS PHENOMENON WILL NOT AFFECT THE PRODUCT CHARACTERISTICS AT ALL.